


BW-10

Intel® Broadwell-U Processor based Mini ITX Motherboard

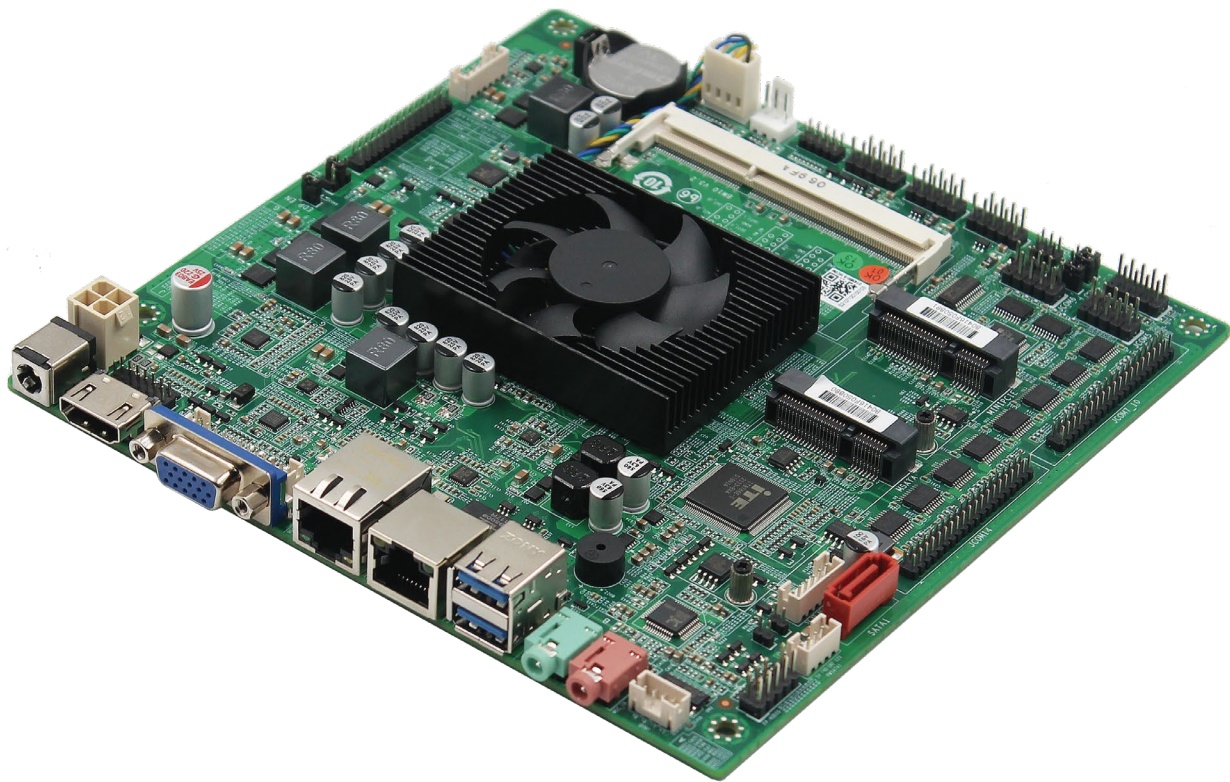

Features

- CPU: Intel Broadwell-U Celeron, Core Processors
- Memory: Single Channel SO-DIMM DDR3L up to 8 GB
- Display: Multiple display via HDMI, VGA, LVDS/eDP
- Ethernet: 10/100/1000Mbps
- Storage: SATA3.0, mSATA
- Expansion: Mini PCIe for WiFi
- Power: 12V DC input



IoT Solutions
Alliance
Industrial Solution
Builders Specialist

Maxtang[®]

MAXIMIZING YOUR COMPUTING PRODUCTIVITY

Introduction

The Maxtang mini-ITX BW10 embedded motherboard is based on Intel Broadwell-U processors, provides a complete PC platform with high performance. A single channel SO-DIMM DDR3L up to 8GB for its memory and SATA3.0, mSATA for its storage. Intel HD graphics (based on CPU) for display via HDMI, VGA, and eDP/LVDS. Rich interfaces include 10xCOM, 2xLAN, 2xUSB3.2 and 6xUSB2.0 caters most market's requirements.

This industrial mini-ITX motherboard offers a lot of functionality right off the rear panel and its internal headers. It is composed of high-quality components intended for a long-life operation that is perfect for industrial environments. It retains a robust design just like all other Maxtang products with stability, reliability, and cost advantages.

I/O Interfaces

Note: 10 COM/6COM Optional *



H/W Monitor




Watchdog



GPIO



Brightness

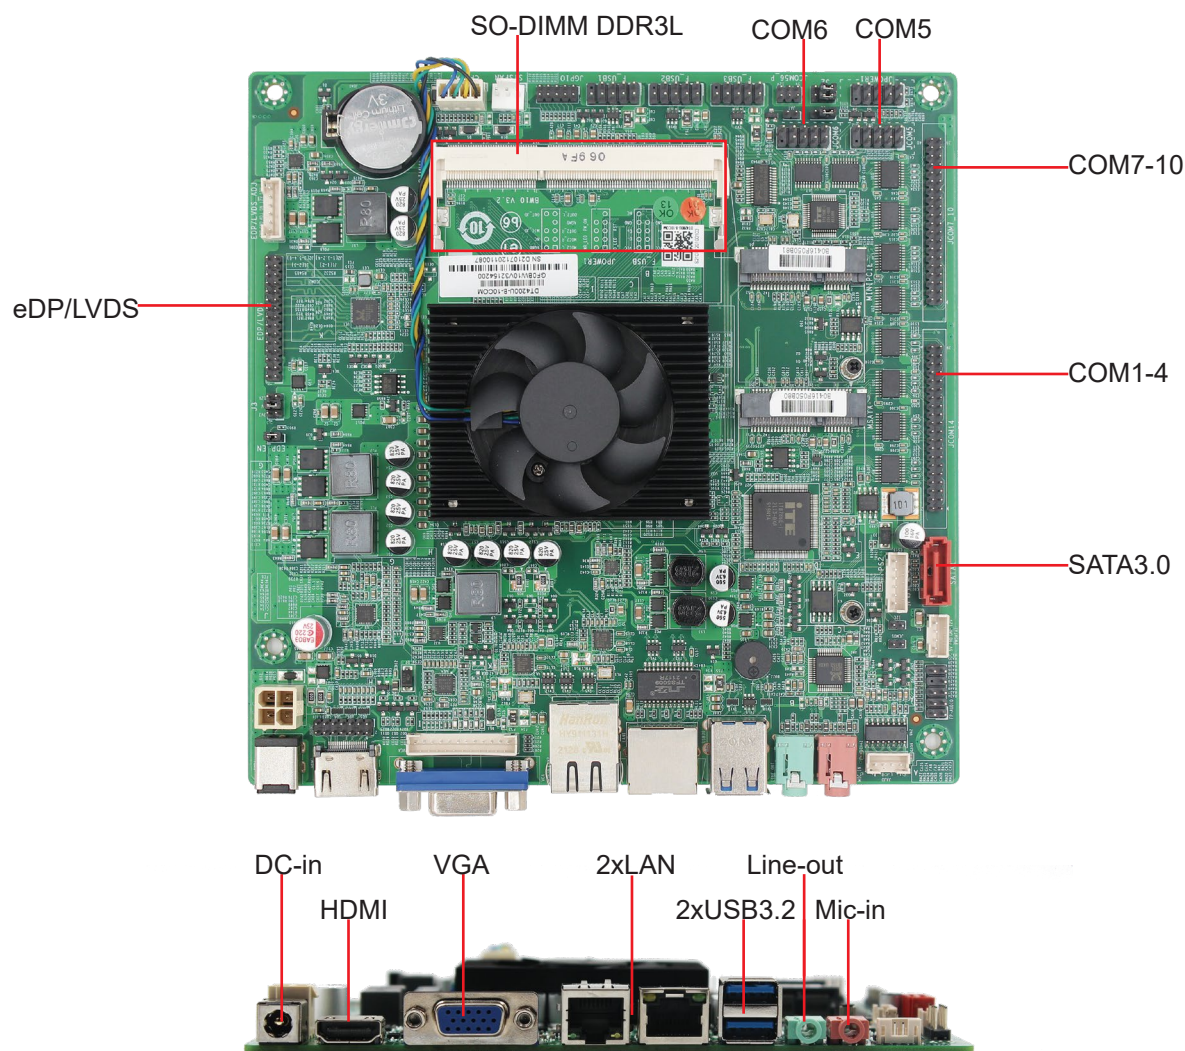


Technical Specifications

Processor	CPU	Celeron 3205U	i3-5010U	i5-5200U	i7-5500U
	Core Frequency	1.50 GHz	2.1 GHz	2.2 GHz	2.4 GHz
	Turbo Frequency			2.7GHz	3.0 GHz
	Cache	2 MB	3MB	3MB	4MB
	TDP	15W	15W	15W	15W
	BIOS	AMI UEFI BIOS			
	Memory	Type	Single Channel SO-DIMM DDR3L		
Max.Capacity		8GB			
Display	GPU	Intel Integrated Graphics based on CPU			
	Display via	1x HDMI+1x VGA+1x LVDS/eDP			
Ethernet	Speed	10/100/1000Mbps			
	Controller	Realtek RTL8111H			
	Interface	RJ45			
	Wake on LAN	Yes			
Audio	Audio Codec	Realtek HD			
	Interface	Line-out, MIC-in, audio header, amplifier header			
Hardware	CPU system temperature, onboard voltage, watchdog, auto power on				
Storage	SATA3.0	1			
	mSATA	1			
Expansion	Mini-PCIe	1 x Mini-PCIe for Wi-Fi			
I/O Interface	LAN	2			
	COM	10/6 x RS232 header, COM 2 can change to RS485			
	USB3.2	2			
	USB2.0	6*header			
	PS/2	1*header			
	GPIO	8 (one group)			
	Audio	1 x Line-out, 1 x Mic-in			
	Dimension	Size	170mm x 170mm		
Board Type		Mini-ITX			
Power	Standard Port	12V DC-in			
	Peripheral Input	For Fan and SATA			
Temperature	Operating Temp.	-20°C to 60°C			
	Storage Temp.	-40°C to 80°C			
Operating System	Win7/8/10 32/64bit, Linux 32/64 bit				

* All specifications and photos are subject to change without notice.

Functional Block Diagram

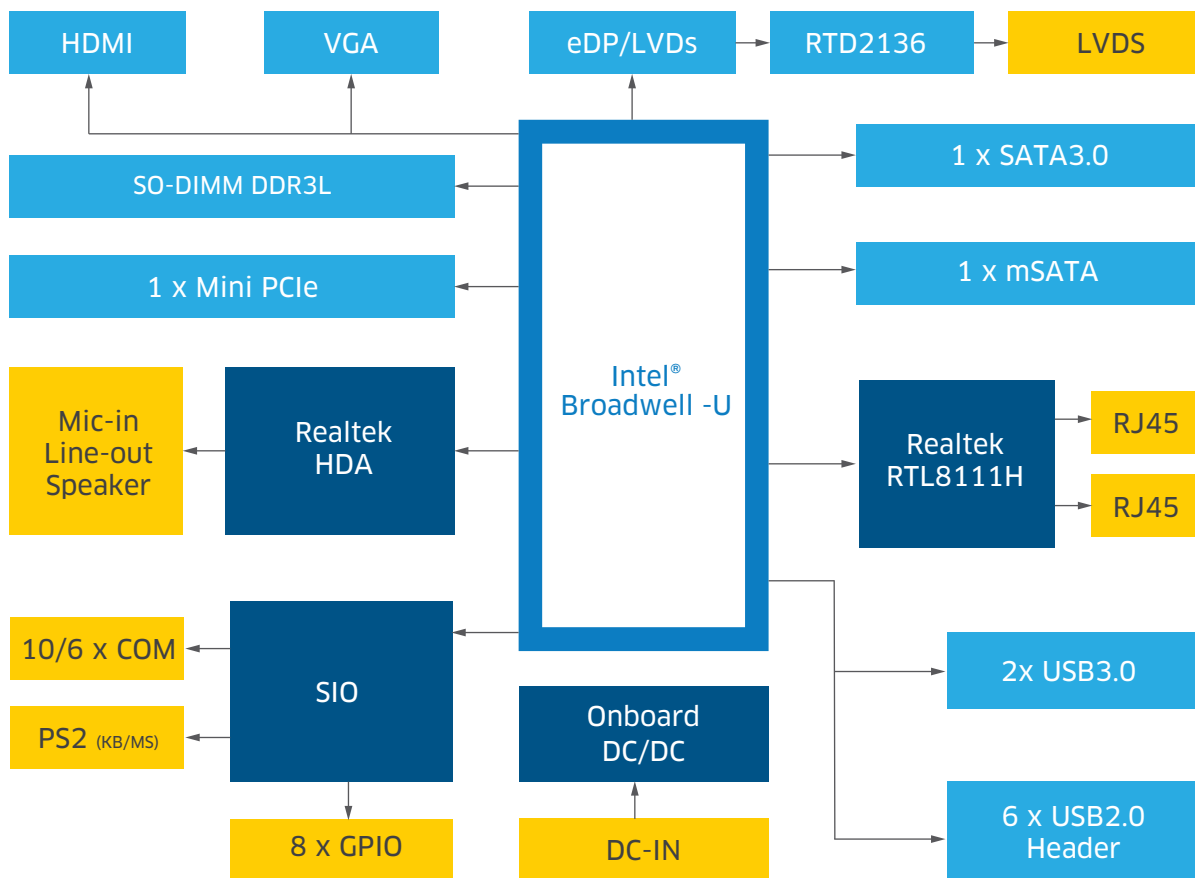

Copyright © 2018 Maxtang Technology Co., Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized.